

20 years

# MILANO COLOR

Paints and systems for the industry and construction sectors



## MIREWALL

Washable  
water-based  
paint

Washable water-based wall paint for interior use.  
Matte finish, high yield, and excellent coverage.



**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes, plasterboard, and old washable and breathable paints that are still well anchored.



**SPECIFIC WEIGHT:**

1,65 Kg/l



**APPLICATION:**

Brush, roller, spray



**DILUTION:**

20%-30% by volume with water  
30%-40% by volume with water for spray applications



**YIELD:**

10-14 m<sup>2</sup>/l per coat depending on the substrate's absorption rate



**MINIMUM APPLICATION TEMPERATURE:**

+10°C

AVAILABLE IN ANY COLOUR

1



## ACRYL POL


Breathable  
water-based  
paint

Breathable water-based wall paint for interior use.  
Matte finish, high yield, and excellent coverage.




**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes, plasterboard, and old washable and breathable paints that are still well anchored. Also suitable for industrial buildings with prefabricated concrete walls and ceilings.



**SPECIFIC WEIGHT:**

1,7 Kg/l



**APPLICATION:**

Brush, roller, spray




**DILUTION:**

20%-30% by volume with water  
30%-40% by volume with water for spray applications



**YIELD:**

10-14 m<sup>2</sup>/l per coat depending on the substrate's absorption rate



**MINIMUM APPLICATION TEMPERATURE:**

+10°C

AVAILABLE IN ANY COLOUR

2



## AMBRO MAT

Water-based  
matte enamel

Water-based wall enamel paint for interior use.  
Smooth, matte finish. Good yield and coverage.  
Excellent washability. Unsaponifiable and odourless.



**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes, plasterboard, and old washable and breathable paints that are still well anchored, after applying a primer.



**SPECIFIC WEIGHT:**

1,36 Kg/l



**APPLICATION:**

Brush, roller, spray



**DILUTION:**

20%-30% by volume with water  
30%-40% by volume with water for spray applications



**YIELD:**

10-14 m<sup>2</sup>/l per coat depending on the substrate's absorption rate




**MINIMUM APPLICATION TEMPERATURE:**

+10°C

AVAILABLE IN ANY COLOUR

3

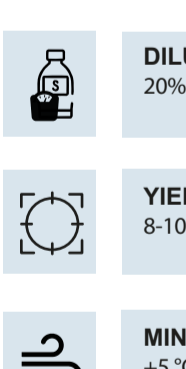

## AMBRO SAT

Water-based  
satin-finish  
enamel

Water-based wall enamel paint for interior use.  
Smooth, satin finish. Good yield and coverage.  
Excellent washability. Unsaponifiable and odourless.




**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes, plasterboard, and old washable and breathable paints that are still well anchored, after applying a primer.



**SPECIFIC WEIGHT:**

1,36 Kg/l



**APPLICATION:**

Brush, roller, spray



**DILUTION:**

20%-30% by volume with water  
30%-40% by volume with water for spray applications



**YIELD:**

10-14 m<sup>2</sup>/l per coat depending on the substrate's absorption rate



**MINIMUM APPLICATION TEMPERATURE:**

+10°C

AVAILABLE IN ANY COLOUR

4



## MAIAQUARZ

Quartz  
coating

Waterborne, quartz flour-based paint for exterior use.




**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes and old paints that are still well anchored.



**SPECIFIC WEIGHT:**

1,65 Kg/l



**APPLICATION:**

Brush, roller




**DILUTION:**

20%-30% by volume with water



**YIELD:**

8-10 m<sup>2</sup> per coat




**MINIMUM APPLICATION TEMPERATURE:**

+5°C, +40°C

AVAILABLE IN ANY COLOUR

5



## TOMMY

Acrylic-siloxane  
coating

High-thickness fibre-reinforced acrylic-siloxane coating for external walls. Containing anti-mould and anti-algae additives for good durability. Available in different grain sizes (1.2-1.5).



**TYPES OF SUBSTRATE:**

Newly applied gypsum plaster finishes and old paints that are still well anchored. Particularly suitable for EIFS systems.



**SPECIFIC WEIGHT:**

1,80 Kg/l



**APPLICATION:**

Steel trowel and subsequently plastic trowel for smoothing



**DILUTION:**

Ready for use



**YIELD:**

2-2.5 Kg/m<sup>2</sup> depending on the grain size



**MINIMUM APPLICATION TEMPERATURE:**

+5°C, +40°C

AVAILABLE IN ANY COLOUR

6

Via Leonardo da Vinci, 172  
TREZZANO SUL NAVIGLIO (MI)  
ITALY  
Tel. +39 02 44576411

Follow us on social media

